

2

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
2. 2	PRODUCTION	6-08	CFS


- NOTES:
1. DEUTSCH TERMINAL: USE DEUTSCH DT-16-00 CRIMPING TOOL AND 16 AWG POSITION.
 2. USE GO/NO-GO SENSOR CONNECTOR TEST FIXTURE TO VERIFY PROPER CONNECTOR MATING AND WIRE COLORS.
 3. PACKAGE COMPLETED SENSOR IN 7 X 9 INCH POLY BAG (ULINE S-3999).

B

B

BOSCH LSU-4 SENSOR
 BOSCH P/N 0 258 007 057/058
 VW P/N 021 906 262B

TERMINAL	COLOR	SIGNAL
1	RED	WB_PUMP
2	BLACK	WB_CELL
3	YELLOW	WB_COM
4	WHITE	WB_HTR-
5	GRAY	WB_HTR+
6	SEAL	

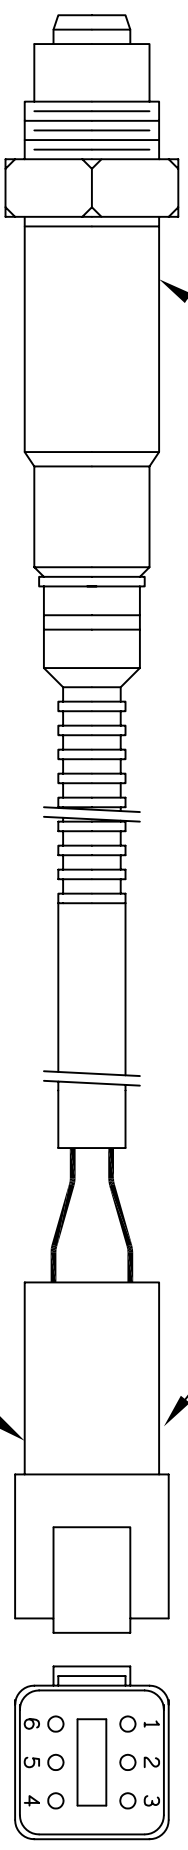

DEUTSCH DT-04-6P
 RECEPTACLE, W6P
 SECONDARY LOCK,
 1060-16-0122 16-18
 AWG MALE TERMINALS,
 AND 114017 SEAL

PART NUMBER 2100-LSU4

A

A

DO NOT SCALE

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ±.125

Daytona Sensors
 933 BEVILLE ROAD, SUITE 101-1
 SOUTH DAYTONA, FL 32119

WEGO LSU-4 SENSOR

DRAWN	3-04	CFS	SIZE	A	SCALE	NONE
APPROVED	3-04	CFS	SHEET	2 OF 2	DRAWING NO.	2207

2

1